

aThis Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 17/21</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/26811</b>
			(43) International Publication Date: <b>11 May 2000 (11.05.00)</b>
(21) International Application Number: <b>PCT/US99/25412</b>			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: <b>28 October 1999 (28.10.99)</b>			
(30) Priority Data: <b>09/183,809</b> <b>30 October 1998 (30.10.98)</b> <b>US</b>			
(71) Applicant: <b>KINKO'S, INC. [US/US]; 255 West Stanley Avenue, Ventura, CA 93002 (US).</b>			
(72) Inventor: <b>TONKIN, Robert; 688 Poli Street #5, Ventura, CA 93001 (US).</b>			
(74) Agents: <b>SHAPIRO, Steven, E. et al.; Mitchell, Silberberg &amp; Knupp LLP, 11377 West Olympic Boulevard, Los Angeles, CA 90064 (US).</b>			

Published

With international search report.

(54) Title: DOCUMENT SELF-VERIFICATION AND ROUTING

(57) Abstract

A system for obtaining and processing information for creating a document. A data packet is transmitted to a remote terminal (31), the data packet including information to generate a user interface (310), and to enable a user to input document information. The document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page (432), a tab page (433), a front cover (431), a back cover (436), and a binding (316-318). The document information is then evaluated by utilizing stored properties for the components to determine whether it is physically possible to create a document according to the document information. Also, the document information can be routed to one of plural document production locations (71-73) based on geographical distance from a specified location and based on capability to produce the document.

310

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## DOCUMENT SELF-VERIFICATION AND ROUTING

### BACKGROUND OF THE INVENTION

#### 5      Field of the Invention

The present invention relates to document self-verification and routing, and particularly relates to techniques in which instructions in a document request order can be verified and the document request routed to an appropriate document production location.

10

#### Description of the Prior Art

The first step in production of a document generally is to create content, such as text and images, to include in the document. The next step is to design the physical appearance of the document, such as by selecting a front cover,  
15 back cover, binding type, and one or more tab pages. Lastly, the document is physically created using these assembly instructions, together with the desired content.

In the past, when it was desired to physically create the document, the author was required to physically go either to the copying department in that person's  
20 company or to an outside company which provides document production services. Once there, he would provide his detailed document assembly instructions and either a hard copy of the pages he wished to include in the document or a copy of the document in electronic form. In addition to the inconvenience of having to go to a remote location, communicating detailed assembly instructions to the person  
25 responsible for physically creating the document often posed another potential problem. Frequently, there were miscommunications or misunderstandings, resulting in a final document which did not appear as the author had intended. In addition, even if the document had been created exactly as the author had intended, upon viewing the final document, the author often was dissatisfied with some aspect of the  
30 document appearance.

Thus, in each of these cases, the final document often would have to be disassembled and the required corrections made. This re-working of the document might only require as few as two or three minutes, for example where the changes involved merely substituting several pages in a small document. On the

other hand, if the author was dissatisfied, for example, with the color of the paper on which the document was printed or in certain cases with the binding selection, then the entire document generally had to be reprinted and reassembled, resulting in a significant waste of time and resources. The problem was even further exacerbated  
5 when the document was large or when many copies of the document had to be corrected.

Several other problems also existed with the conventional methods for ordering a document. For instance, not only was the author required to physically go to a remote location, but upon reaching that location he might then discover that  
10 that location did not have the capabilities to produce the document as requested. For example, the facility might not be readily capable of color printing in the volume required by the author. In this case, the author might be redirected to a different location, necessitating even further travel time and inconvenience. Alternatively, the first location could accept the order and then forward it to a different location, such  
15 as by telephone or by facsimile. However, in this latter case, the information would have to be re-communicated, increasing the likelihood of the miscommunication and misunderstanding problems mentioned above.

Other problems with the conventional method of ordering a document relate to actual construction of the document. In this regard, in the conventional  
20 method the author typically conveyed a set of instructions for creating a document. However, those instructions often were not in the best format for actually creating the document. Therefore, the document assembler often had to go through the instructions and extract information to determine, for example, what types of supplies he would need and what equipment and how much labor will be required to produce  
25 the document. Based on this information, he could provide a price quote and an estimated time of completion and either begin working on the order or re-direct it to a more capable facility. However, the foregoing tasks often required a significant amount of time and effort. Moreover, in view of the importance of the information obtained, particular attention to accuracy was required.

30 Finally, using the conventional method, it was often discovered late in the process that the document could not be assembled as specified by the author. For instance, it might be discovered that the document was too large for the specified binding type. This typically required the document production facility to stop working

on the document until the author could be contacted and a substitute binding selected, resulting in additional inconvenience.

### SUMMARY OF THE INVENTION

5           The present invention addresses the foregoing problems by evaluating whether it is physically possible to create a document according to document assembly information input via a user interface.

Thus, in one aspect, the invention obtains and processes information for creating a document. A data packet is transmitted to a remote terminal, the data  
10 packet including information to generate a user interface and to enable a user to input document information. The document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding. The document information is then evaluated by utilizing stored properties for the  
15 components to determine whether it is physically possible to create a document according to the document information.

In another aspect, the invention obtains and processes information for creating a document by transmitting a data packet to a remote terminal, receiving document information from the remote terminal, and formatting the document  
20 information so as to facilitate assembly of a document. According to this aspect of the invention, the data packet transmitted to the remote terminal includes information to generate a user interface and information to enable a user to input document information, where the document information specifies an arrangement of components for creating a document, the components including at least two of: a  
25 printed page, a tab page, a front cover, a back cover, and a binding. The information included also includes computer executable process steps to evaluate the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document according to the document information.

By allowing a user to submit document order information via a user  
30 interface, the invention can significantly reduce the inconvenience of having to physically go to a document production location. Moreover, the invention can often reduce delays, miscommunications and time and effort by evaluating the document information, utilizing stored properties for the document components, to determine

whether it is physically possible to create a document according to the document information. In addition, formatting order information according to the invention often can also facilitate document assembly and/or order request routing.

The present invention also addresses problems in the prior art by  
5 routed information for assembling a document to one of plural document production locations based on geographic distance from a specified location and based on capability to produce the document.

Thus, in a still further aspect, the invention obtains, processes and routes information for creating a document by transmitting a data packet to a remote  
10 terminal. The data packet includes information to generate a user interface and to enable a user to input document information, the document information specifying an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding. The document information is received from the remote terminal and routed to one of  
15 plural document production locations based on geographic distance from a specified location and based on capability to produce the document.

By generating and routing document assembly information in the foregoing manner, the present invention often can achieve significant increases in efficiency in a document ordering and delivery system. Specifically, the foregoing  
20 arrangement often can both eliminate the need for a document author to physically visit a document production location and facilitate efficient production and delivery of the document.

The foregoing summary is intended merely to provide a brief description of the general nature of the invention. A more complete understanding  
25 of the invention can be obtained by referring to the claims and the following detailed description of the preferred embodiments in connection with the accompanying figures.

#### BRIEF DESCRIPTION OF THE DRAWINGS

30 Figure 1 is a block diagram of an environment in which the present invention can be practiced.

Figure 2 is a block diagram of a general purpose computer system, representing one suitable computer platform for implementing the communication nodes illustrated in Figure 1.

Figure 3 is a flow diagram illustrating an overview of a system  
5 according to a representative embodiment of the invention.

Figure 4 is a flow diagram illustrating document specification, previewing and ordering according to a representative embodiment of the invention.

Figures 5A through 5F illustrate windows in a graphic user interface which can be displayed on one of the terminals shown in Figure 1 for use in  
10 constructing, previewing and ordering a document according to the present invention.

Figure 6 illustrates one example of a document object and document component sub-objects which can be used in the practice of the present invention.

Figure 7 is a flow diagram illustrating generation of document image  
15 data according to a representative embodiment of the invention.

Figures 8A through 8E illustrate windows in the graphic user interface for previewing a document according to a representative embodiment of the present invention.

Figure 9 illustrates reformatted document data to facilitate document  
20 assembly and routing according to the preferred embodiment of the invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following description explains representative embodiments of the  
25 invention. While the following embodiments are provided to explain the nature of the invention, it should be understood that the present invention is not limited only to these embodiments.

### Operating Environment

30 Figure 1 is a block diagram illustrating the structure of the preferred environment in which the present invention operates. Shown in Figure 1 are terminals 31 and 32, which may comprise an ordinary computer workstation, a laptop computer, or special-purpose computing equipment. Terminals 31 and 32



communicate with internet service providers (ISPs) 41 and 42 via a telephone connection, such as by using a modem interface. ISPs 41 and 42, in turn, connect to internet backbone 50 via their respective routers (not shown). Specifically, ISP 41 receives internet messages from terminal 31 and then routes them onto internet backbone 50. Also, ISP 41 pulls messages off internet backbone 50 that are addressed to terminal 31 and communicates those messages to terminal 31 via the telephone connection. In a similar manner, terminal 32 also can communicate over the internet through ISP 42.

Also connected to internet backbone 50 is processing facility 60. As discussed in more detail below, one function performed by processing facility 60 is to retrieve document order messages sent over the internet 50, process those orders and then distribute them to one of various document production locations. For this latter purpose, processing facility 60 also is connected to wide area network (WAN) 70. Multiple document production locations, such as locations 71 to 73, also are connected to WAN 70. After determining which document production location should receive a particular order, processing facility 60 routes a message addressed to that document production location onto WAN 70. The respective document production location then retrieves the message off of WAN 70. Generally, each such facility and location will connect to WAN 70 through a router (not shown).

Although terminals 31 and 32 are shown in Figure 1 as being attached to processing facility 60 via the internet 50, other methods can also be used for communicating between remote terminals and the processing facility, such as by utilizing a direct modem/telephone line dial-in connection, a wide area network, a local area network or any other communication system. Furthermore, different terminals may be connected to processing facility 60 via different communication systems. For example, individual computer workstations might connect to processing facility 60 via the internet 50, while terminals under common ownership with processing facility 60 might communicate with processing facility 60 via a WAN or a direct dial-in connection. Similarly, although processing facility 60 is shown in Figure 1 as being connected to the various document production locations using WAN 70, any other communication system may also (or instead) be used, such as a wide area network, local area network, internet, or direct modem/telephone line dial-in connection.

Figure 2 illustrates a block diagram of a general purpose computer system which can be used to implement terminals 31 and 32, processing facility 60, and/or document production locations 71 to 73. Specifically, Figure 2 shows a general purpose computer system 150 for use in practicing the present invention.

5 As shown in Figure 2, computer system 150 includes a central processing unit (CPU) 152, read-only memory (ROM) 154, random access memory (RAM) 156, expansion RAM 158, input/output (I/O) circuitry 160, display assembly 162, input device 164, and expansion bus 166. Computer system 150 may also optionally include a mass storage unit 168 such as a disk drive unit or nonvolatile memory such as flash

10 memory and a real-time clock 170.

CPU 152 is coupled to ROM 154 by a data bus 172, control bus 174, and address bus 176. ROM 154 contains the basic operating system for the computer system 150. CPU 152 is also connected to RAM 156 by busses 172, 174, and 176. Expansion RAM 158 is optionally coupled to RAM 156 for use by CPU

15 152. CPU 152 is also coupled to the I/O circuitry 160 by data bus 172, control bus 174, and address bus 176 to permit data transfers with peripheral devices.

I/O circuitry 160 typically includes a number of latches, registers and direct memory access (DMA) controllers. The purpose of I/O circuitry 160 is to provide an interface between CPU 152 and such peripheral devices as display

20 assembly 162, input device 164, and mass storage 168.

Display assembly 162 of computer system 150 is an output device coupled to I/O circuitry 160 by a data bus 178. Display assembly 162 receives data from I/O circuitry 160 via bus 178 and displays that data on a suitable screen.

The screen for display assembly 162 can be a device that uses a

25 cathode-ray tube (CRT), liquid crystal display (LCD), or the like, of the types commercially available from a variety of manufacturers. Input device 164 can be a keyboard, a mouse, a stylus working in cooperation with a position-sensing display, or the like. The aforementioned input devices are available from a variety of vendors and are well known in the art.

30 Some type of mass storage 168 generally is considered desirable. However, mass storage 168 can be eliminated by providing a sufficient amount of RAM 156 and expansion RAM 158 to store user application programs and data. In that case, RAMs 156 and 158 can optionally be provided with a backup battery to

prevent the loss of data even when computer system 150 is turned off. However, it is generally desirable to have some type of long term mass storage 168 such as a commercially available hard disk drive, nonvolatile memory such as flash memory, battery backed RAM, PC-data cards, or the like.

5 A removable storage read/write device 169 may be coupled to I/O circuitry 160 to read from and to write to a removable storage media 171. Removable storage media 171 may represent, for example, a magnetic disk, a magnetic tape, an opto-magnetic disk, an optical disk, or the like.

In operation, information is input into the computer system 150 by  
10 typing on a keyboard, manipulating a mouse or trackball, or "writing" on a tablet or on position-sensing screen of display assembly 162. CPU 152 then processes the data under control of an operating system and an application program, such as a program to perform steps of the inventive method described above, stored in ROM 154 and/or RAM 156. CPU 152 then typically produces data which is output to the  
15 display assembly 162 to produce appropriate images on its screen.

Expansion bus 166 is coupled to data bus 172, control bus 174, and address bus 176. Expansion bus 166 provides extra ports to couple devices such as network interface circuits, modems, display switches, microphones, speakers, etc. to CPU 152. Network communication is accomplished through the network interface  
20 circuit and an appropriate network.

Suitable computers for use in implementing the present invention may be obtained from various vendors. Various computers, however, may be used depending upon the size and complexity of the required tasks. Suitable computers include mainframe computers, multiprocessor computers, workstations or personal  
25 computers. In addition, although a general purpose computer system has been described above, a special-purpose computer may also (or instead) be used at the document production locations, processing facility and/or remote terminals.

### System Overview

30 Figure 3 is a flow diagram illustrating an overview of the processing steps performed according to a representative embodiment of the invention. For example, the process steps illustrated in Figure 3 can initially be stored on mass storage device 168, downloaded into RAM 156, and then executed by

microprocessor 152 out of RAM 156. Briefly, according to Figure 3, processing facility 16 monitors for requests; communicates document specification information with a remote terminal (client) and transmits a Java applet to the remote terminal if an initial request is received; when an order request is received, processing facility 5 60 processes the order information, evaluates and routes the order, and then transmits a confirmation message to the requesting terminal.

In more detail, in step 202 processing facility 60 monitors internet traffic for messages directed to it. In this regard, processing facility 60 generally will conduct various communications over the internet with remote terminals. For 10 example, processing facility 60 might receive a request from a remote terminal to view the processing facility's home web page. In response, processing facility 60 will route an IP packet to the requestor which includes an HTML message for displaying its home page. Navigating through the facility's various web pages, beginning with the home page, a remote terminal operator might eventually click on icon requesting 15 initial ordering information. In response, the user's remote terminal, running an internet browser, will generate an IP packet containing a request for such information.

Upon receiving that request in step 204, processing facility 60 sends a response message in step 206. Preferably, the response message includes HTML 20 code to create an initial document creation window and a Java applet which can be executed on a remote terminal to enable a user to preview a specified document. A more detailed explanation of such communication and the functioning of the Java applet in this embodiment of the invention is described below.

When such an order request is received in step 208 by the processing 25 facility 60, processing proceeds to step 210. In step 210, the received order information is processed to format the information so as to facilitate assembly of the document and also to facilitate routing of the order information. In step 212, the order information is evaluated and a document production location is selected to process the order. The document specification is then routed via WAN 70 to that 30 document production location. Finally, in step 214 an order confirmation is transmitted from processing facility 60 to the requesting terminal. Steps 210, 212 and 214 are discussed in more detail below.

### Document Specification, Previewing and Ordering

Figure 4 illustrates process steps executed to enable a user to specify assembly instructions for a document, preview the document as assembled and order the document according to the present embodiment of the invention. Briefly, according to Figure 4, a document creation window is displayed; information is input specifying the arrangement of the document; upon user designation that the document specification is ready, the information is tested to determine whether it is valid; if not valid, an error message is displayed and the document specification can be revised; if the document specification is valid, a document image is generated and displayed; upon the user's selection of a different portion of the document, a new image corresponding to that portion of the document is displayed; upon the user's selection of an "edit" button, a window is displayed allowing the user to revise the document specification; upon the user's acceptance of the document specification, an order request including the document specification is transmitted to processing facility 60.

In more detail, in step 252 a document creation window is displayed. This is the initial window in defining a new document, and preferably is received from processing facility 60 as a web page.

In step 254, information regarding the document structure is input as the user navigates through various windows adding components to the document and defining those components. An example of creating a document and inputting document specification for the document is described below in connection with Figures 5A through 5F.

Specifically, Figures 5A through 5F illustrate portions of the graphic user interface displayed on a computer monitor to allow a user to create a document and then to input and modify the document specification for creating the document, in the preferred embodiment of the invention. Typically, a user enters information via such a graphic user interface by entering information in various displayed fields and selecting displayed items using a computer keyboard and/or a pointing device, such as a computer mouse. Construction of such user interfaces is well known in the art. As noted above, in the present embodiment, the various pages of the graphic user interface are provided from processing facility 60, preferably as HTML coded web pages.

The initial document creation window 300 utilized in the present embodiment of the invention is illustrated in Figure 5A. As indicated above, this window is displayed in step 252. As shown in Figure 5A, the initial document creation window 300 includes a field for the user to enter a new document name 301 and a field 302 for the user to indicate whether the document is being built from scratch or is based on another document. If based on another document, the new document initially will have all the characteristics of the "based on" document. That is, those characteristics are merely copied over from the stored existing document. In further steps, the user can then modify that information as desired. Clicking on "OK" button 303 brings up main editing window 310, shown in Figure 5B, while clicking on "Cancel" button 344 deletes the entered information.

Figure 5B illustrates the main document editing window 310. In the present embodiment of the invention, this is the first window opened in step 254. As seen in Figure 5B, a field 311 is displayed and includes the document name entered by the user in field 301 of document creation window 300. In field 312, the user enters a source file which includes the content to be included in the document. Preferably, the source file is in portable document format (PDF). However, the present invention can be configured so as to accept source files in other formats, such as word processing documents, spreadsheet documents and compound documents. If such other formats are in fact allowed, it is preferable to first convert them into a portable document format, so as to enable the user to view the document content as it will actually be printed. This will enable the user to verify that page breaks and other formatting details will be as expected.

Also included in main document editing window 310 are radio buttons 314 for the user to select paper size. Specifically, the user can elect to use the paper size indicated in the source file, in which case the paper size specified in the source file will be detected automatically. Alternatively, the user can select a different paper size, in which case the content automatically will be scaled to fit the selected paper size. Although the present embodiment utilizes only a single paper size, it is noted that the invention is not so limited, and other embodiments of the invention may include more than a single paper size in the document.

Fields 316, 317 and 318 allow a user to specify the side which is to be bound (e.g., left side or top side), the type of binding to use (e.g., coil binder, tape

binding, perfect binding), and binding color respectively. Clicking on the arrow associated with each field causes a list of options to be displayed for that field. Thus, for example, a user might select a black coil binder to be placed on the left side of the document.

5           Field 320 allows a user to select staple options, such as none, upper left corner, or top center. It should be noted that while stapling is treated differently than binding in the present embodiment of the invention, in other embodiments stapling might be treated as one type of binding. Field 322 allows the user to specify whether and what types of holes are to be drilled in the document. Field 324 allows  
10 the user to specify machine folding of the pages. In each case, clicking on the down arrow causes a list of options to be displayed.

The document composition portion of editing window 310 provides a list 326 of the other document components which have been designated for inclusion within the document, and includes button 328 to add new components, button 330  
15 to remove components, and button 332 to edit a component. Also included are buttons 334 and 336 to navigate up and down, respectively, through list 326. Box 340 permits the user to add comments to the document description.

Upon clicking on Add button 328, a new window 360 is displayed, as shown in Figure 5C. Window 360 includes a field 362 which allows a user to  
20 designate what type of new component he would like to create. Clicking on the associated down arrow brings up a list of options, such as front cover, printed pages, tab pages and back cover. After selecting a component to create, the user can click on the "OK" button 364 or "Cancel" button 366. Cancel button 366 returns the user to window 310 (shown in Figure 5B). On the other hand, clicking on the "OK" button  
25 364 causes the printed pages editing window 380 to be displayed, as shown in Figure 5D.

Printed pages editing window 380 includes fields 382 and 384 for specifying a range of pages from the source file to be printed. In addition, printed pages editing window 380 includes fields 386, 388 and 390 for specifying the media  
30 type on which to print the specified pages. For instance, the user can specify a medium from the paper stock options 386, the card stock options 388, or the special stock options 390 (e.g., transparencies). Clicking on the down arrow button in the associated field brings up a list of options for that medium type.

Printed pages editing window 380 also includes radio buttons 392 for selecting either black and white or color printing, 394 for selecting single-sided or double-sided printing, and 396 for selecting standard or digital printing. Upon completion of the printed pages specification, the user can click on "OK" button 398, 5 in which case the input information is incorporated into the document and the user is returned to main editing window 310. Alternatively, the user may click on cancel button 400, in which case the input information is deleted and the user is returned to new component window 360.

Figure 5E illustrates the appearance of main editing window 310 after 10 the new "printed pages" component has been added. As seen in Figure 5E, list 326 in the document composition portion of the window now includes an entry 327 summarizing the features of the new "printed pages" component of the document.

Continuing in this manner, a user can specify new components, remove components, or edit the descriptions of existing components until he is satisfied with 15 the composition of the document.

Figure 5F illustrates the appearance of main editing window 310 after a document composition has been fully specified. As seen in Figure 5F, the source file is specified as "html4"; the user has selected to use the paper size from the source file, which has been detected as being 8½ x11; a black comb binder has 20 been selected and is to be applied to the left side of the document; and the user has selected no stapling, drilling or folding.

Document component list 326 lists a front cover 431, followed by 363 printed pages 432, followed by a tab page 432 with the words "The End" written on the tab in Helvetica font, followed by 363 printed pages 433, followed 363 printed 25 pages 434, followed back cover 435.

The data structures used in the present embodiment of the invention will now be described with reference to Figure 6. When a user creates a new document, an object 480 is created for the document. Each document object 480 has the following attributes: a user-specified name 481, a list of document 30 components 482, size 483 in length and width, thickness 484, weight 485 and validation flag 486.

List of document components 482 preferably includes a list of pointers to sub-objects for the various user-specified components. These sub-objects might



include, for example, a printed pages document component 500, a tab page document component 520 and a binder type component 540. Preferably, the attribute values for each such sub-object have been supplied by the user via the graphic user interface.

- 5           The size 483, thickness 484, weight 485 and validation flag 486 attributes of document object 480 initially have unspecified values. Their values are assigned as described below.

Also transmitted to the remote terminal in this embodiment of the invention, are production component objects for the production components to be  
10 used in the document. Preferably, the production component objects are organized into classes, with each member inheriting attributes from the class to which it belongs. Thus, for example, there might be a "printed page" class, and the members of the class might include 8-1/2x11" transparency and A4 white bond. Similarly, a binder class might include perfect binding and a 1" coil binder. The attributes for  
15 each production component object describe physical properties of the component and also include an image of the component. These physical properties include, for example, thickness, size, weight, and various other component-specific properties, such as whether the component can be printed in color or only in black & white (printed pages). The image of each production component preferably is in bitmap  
20 format, but also may be stored in any other format and may be either compressed or uncompressed.

If the user has specified a particular component, the document component object corresponding to that component will include a pointer to a production component object for that particular component. This is generally the  
25 case for printed pages and tab pages. On the other hand, if the user has merely specified a type of a component to be used, the corresponding document component object preferably will merely include a reference to a class or a sub-class of production components. This will generally be the case for document bindings. In this regard, it is generally preferable to allow the user to specify a type of binding and  
30 allow the software to select a specific binding of that type based on properties, such as thickness, of the final document. Such a selection process is described below.

When the document specification has been completed, the user indicates that the document specification is ready. In the present embodiment, this

is accomplished by clicking on "OK" button 342 (shown in Figure 5F) of the main document editing window 310.

Returning to Figure 4, upon receiving an indication that the document specification is ready, processing proceeds from step 254 to step 255. In step 255, the document component objects are combined with the production component objects. Combining these objects results in: (1) determination of values for the remaining document attributes 483 to 486 and (2) selection of specific production components for those cases where the user has merely specified a component type.

With regard to the former, document size, thickness and weight can easily be determined based on the corresponding properties for the production components and based on the number of each such production component specified by the document object and sub-objects. Specifically, the document thickness generally will be the sum of the thicknesses of each production component used, modified to account for an estimate of the amount of toner required for printing. Similarly, the document weight generally will be the sum of the weights of all the production components used, less the effects of any hole drilling, and then modified to account for an estimate of the amount of toner required for printing. Document size generally will be the maximum size in each dimension of the various production components used to assemble the document. Various other factors may, however, affect the foregoing calculations. For instance, if the user has specified that a particular component is to be folded, then the effects of such folding on size and thickness should be taken into account.

Once the document properties have been calculated, specific production components can be selected for those cases where the user has merely specified a component type. As noted above, it often will be desirable to defer selection of a specific component until certain document properties have been determined. In the present embodiment, the only component for which a type only is specified is the binding. As shown in Figure 6, each binding component has as attributes the minimum and maximum thicknesses that it can accommodate. Therefore, at this point the number of available bindings can be narrowed to those that are of the type and color specified by the user and that also can accommodate the thickness of the present document. In the event that more than one binding is still available, the binding to be used can be selected from the remaining bindings

based on a predetermined rule, such as selecting the smallest binding left. In the event that there are no bindings of the selected type that can accommodate the document, that fact is indicated.

In step 256, it is determined whether the user defined information is valid. Specifically, this step checks whether a document can be physically created as specified and preferably occurs automatically as a result of combining the document component objects and production component objects, as described above. This step determines, for example, whether the user has specified double-sided printing for a media type which is only capable of single-sided printing (e.g., transparency), whether the user has specified color printing for a media type which can only be printed in black and white (e.g., certain card stocks), whether the user has specified a binding type which can not accommodate the document (e.g., because the document is too thick or too thin), or whether the user has specified printing on a media type which cannot be printed (e.g., vinyl).

In the event that the information is invalid, an error message is displayed in step 258, preferably indicating the nature of the error, and then processing proceeds to step 254 to allow the user to revise the document specification. If the document specification is valid, processing proceeds to step 260.

In step 260, image data are generated for the document. In the following discussion, it is assumed that images stored for the production components are in uncompressed bitmap format. If this is not the case, then the image data for each production component preferably is decompressed and/or converted to bitmap format prior to being used, in order to facilitate the processing.

Figure 7 illustrates a flow diagram for explaining document image data generation according to a representative embodiment of the invention. Briefly, according to Figure 7, content is mapped from the source file onto document pages; index information is generated, image data are generated for printed image components; image data are generated for tab pages; binder image data and position/display information are obtained; and then an image is generated for each document view by positioning images of the main pages, superimposing an image of the binder, and identifying and adding to the document image certain portions of images of oversized components.

In more detail, in step 582 content pages from the source file are mapped onto document pages. Thus, for example, if a printed pages component specifies source pages 1-100 and double-sided printing, then 50 document pages are defined, with source page 1 being printed on the front side of the first document page in the group, source page 2 being printed on the back side of the first document page in the group, and so on.

In step 584, based on the mapping in step 582, index information is generated linking the document pages to information referenced in the document components.

10 In step 586, image data are generated for the printed image components of the document. Preferably, this step is performed by retrieving the image data for the production component, converting the content data to bitmap image data as necessary, and combining these bitmap image data to provide a single image. This may require scaling of the content image data either: (1) because  
15 the user has specified a different page size than that of the source file, (2) because the images are to be displayed in a reduced size (e.g., thumbnail), or (3) for both reasons. Alternatively, if the content image data has to be converted to bitmap image data, it can be immediately converted to the appropriate size.

Once the two bitmap images are in the same scale, they can be  
20 combined on a pixel-by-pixel basis. Preferably, this is done by simply multiplying the respective RGB intensity values (or grayscale intensity values for monochrome images), where the intensity values range between 0 and 1. Thus, if the production component RGB values for a pixel are (1.0, 0.5, 0.5) and the RGB values for a corresponding image pixel in the source file are (0.5, 0, 0.5), then the RGB values  
25 for the combined pixel would be (0.5, 0, 0.25). It is noted that other techniques for combining the image data may instead be used. For example, such techniques might reflect color processing that is intended to be performed during document production.

Step 586 is repeated for each document component to be printed with  
30 information from the source file. These components might include, for example, printed pages, the front cover, the back cover, and in certain embodiments, tab pages.

In step 588, tab page images are generated. This step is performed for the front of the tab page by obtaining the image of the tab page, rendering the text to be included on the tab to form a bit map image of that text, and superimposing the rendered text image onto the tab in the proper orientation. The back of the tab  
5 page can be generated simply by reversing the tab page image in the x dimension.

In step 590, the image of the binding is obtained, together with binding display information from the binding object.

Step 592 begins a loop which is repeated for each document view. Typically, these views will include: the front surface of the front cover, each  
10 document open position, and the back surface of the back cover.

In step 594, the images of the main pages for the current view are positioned. Generally, if the document is to be closed in the face-up position (which is the initial image generated in this embodiment of the invention), this will be the front surface of the front cover. If the document is to be in an open position, and  
15 assuming the document is bound on the left side, this will involve placing the image of the back side of one page so that its right edge is adjacent to the left edge of the front side of the next succeeding page in the document, with the exact spacing between the page edges specified by the display information associated with the selected binding. For certain types of binding (e.g., perfect binding) there will be little  
20 or no spacing between the page edges, while for other types (e.g., coil binding) there will be a noticeable gap between the adjacent page edges. If the document is to be in the closed face-down position, only the back side of the back cover will be positioned.

In step 596, the binding image is superimposed over these document  
25 pages based on the display information. Such display information will indicate where the binding is to be placed relative to the document pages in the current view and if it is to be displayed at all. Thus, for tape bound documents, the tape will be shown only if either the front side of the front cover or the back side of the back cover is to be displayed. Similarly, the rings of a three-ring binder will only be displayed if the  
30 document is to be in an open position. The display information also will indicate how much the binding is to overlap the page images.

In step 598, oversized components are identified and portions of their images are added to the current display image as necessary. The most common

example here is that of a tab page. If a tab page is prior to the current document position, then the back side of the tab (no text) from the tab page will be placed adjacent to the left page image, at the appropriate location. Similarly, if a tab page is subsequent to the current document position, then the front side of the tab (text side) from the tab page will be placed adjacent to the right page image, at the appropriate location. As another example, if a three-ring binder is used, an image of the binder generally will be placed around the displayed pages when the document is to be in the open position.

Upon completion of the foregoing loop, image data for each document position will have been generated. Returning now to Figure 4, in step 262 an image of the document is displayed. In the preferred embodiment, this is the front side of the front cover. An example is the document shown in viewing window 620, in Figure 8A. As shown in Figure 8A, the front side of the front cover 630 is displayed, together with an image of the selected binder 632 and the front side 634 of the tab on the tab page included in the document.

Returning to Figure 4, in step 264 if the user selects a different portion of the document, processing proceeds to step 262 and that portion of the document is displayed.

In the preferred embodiment of the invention, document viewing window 620 enables the user to navigate through the document in several different ways. Clicking on the image of the front cover advances to a view of the document as though a single page had been turned in the document. Figure 8B illustrates the results of this action, in which element 633 is an image of the back side of the front cover and element 639 is an image of the front side of the first page after the front cover. Alternatively, using field 636, the user can select any of the document components and advance immediately to that component. If the user selects a "printed pages" section in this manner, he will be prompted as to which page in the page range he wishes to advance. Using the previously generated index information, the applet will immediately display an image of that page in the document. Finally, the user also can click on tab 634 and, using the index information, the applet will immediately advance to the tab page in the document.

Figure 8C illustrates an arbitrary open position in the document. From this position the user can click on either the left displayed page 650 to turn back one

page or the right displayed page 652 to advance one page in the document. Once again, clicking on tab 634 immediately advances to the tab page. The result of this action is illustrated in Figure 8D.

Finally, Figure 8E illustrates the back side 660 of the back cover of the document. From this view, the binding image 632 is also displayed, together with the back side 635 (no text) of the tab.

It is noted that although certain techniques are used to navigate through the displayed virtual document in the present embodiment of the invention, the invention is not limited to these techniques and any other techniques may also (or instead) be used.

In the present embodiment of the invention, the document specification is generated by communicating over the internet. Specifically, processing facility 60 transmits web pages to the remote terminal. Information input by a user is then submitted to the processing facility. When the user indicates that the document is ready to be displayed, the Java applet received from processing facility 60, running on the remote terminal (client), opens a connection to processing facility 60 in order to download document and production component information, as needed. The Java applet then controls display of the document image according to the above-described user document navigation requests.

Returning again to Figure 4, in step 266 the user may elect to edit the document specification after having viewed the document images. In this case, processing proceeds to step 254 to display the main document editing window 310.

The user also may "accept" the document in step 268, in which case, in step 270 an order request including the document specification is transmitted to processing facility 60 via the internet or another communication system. Preferably, the order request also includes user identification information which may be input at the time of order or may have been supplied earlier, such as part of an initial login to the processing facility's web page.

### 30 Receipt of Order Request

As noted briefly above, upon receipt of the order, processing facility 60 processes the order information in step 210 (shown in Figure 3) so as to facilitate assembly of the document and also to facilitate routing of the order information. An

example of this formatting is window 670, illustrated in Figure 9. As shown in Figure 9, in the present embodiment of the invention, the information is formatted to include a production summary which lists: (1) materials required 672 by stock number and description, (2) printing required 674 by type, with an estimated run time for each type of printing, and (3) labor required 676 with a description of each type of work and an estimate of the time required to complete each work item. The production summary also preferably includes a total estimated run time 675, and may optionally include an estimated price for each item and/or a total price for the work.

Also shown in Figure 9, the formatted information further includes a document summary listing the source file name 678 and, in order of appearance in the document, a printing summary 680 including the type of printing, media on which to print and number of sheets for each printing job in the order request. It should be noted that the formatted information according to the invention may be arranged or presented in different ways and new summary information generated and added to the report so as to facilitate document production and routing.

In step 212 (shown in Figure 3), the order information is automatically evaluated and routed to one of the production locations. Preferably, processing facility 60 has a stored database with information regarding the capabilities and geographic location of each of the production locations. In the preferred embodiment, geographic location is taken into account by comparing distances from the document production locations to the recipient's location. Furthermore, in certain embodiments of the invention, it might be desirable to estimate geographic distance based on zip code. Accordingly, the document order can be routed to the location nearest to the recipient's location that is appropriate for processing the order.

In this regard, it is noted that whether a location is appropriate for processing an order might merely mean whether the location is capable of producing the document, but more often will mean more than mere capability, such as indicating whether the location normally handles such work or can readily handle such work. For example, based on equipment levels, supply levels and/or staffing, each location might be rated as capable of handling jobs of a certain type up to a certain size, but not jobs of the same type larger than the specified size, even though the location is physically capable of handling such larger jobs.



Alternatively, the routing decision may be based on any combination of a capabilities factor and geographic distance to the recipient's location. In this case, the tradeoff between capabilities and distance preferably is made so as to minimize total cost. For example, for certain large orders it may be preferable to  
5 route the order to a more distant production location that has faster equipment or the capability to handle larger volumes. For such orders, the added transportation time and cost might be offset by increased document production efficiency or efficiencies obtained from balancing work loads among various document production locations. However, for a smaller order, distance to the recipient might be the most important  
10 factor. In any event, it is preferable that the routing decision be made automatically according to a predetermined method.

In step 214 (shown in Figure 3), an order confirmation is transmitted to the customer over the internet or whichever other communication system is used for communicating between the two. The confirmation might include, for example, a  
15 price quote and/or an estimated time of completion.

Upon completion of the above process steps, the document is assembled according to the document specification. Document assembly techniques are well known in the art and can be entirely manual, or partially or fully automated.

20

### Conclusion

The systems and techniques of the present invention can overcome many of the problems associated with conventional document ordering. By providing a way for a user to preview an image of a document before ordering it, the invention  
25 can often eliminate unexpected surprises in the appearance of the final document. In addition, the person constructing the document can also view images of the document, if necessary, to obtain a sense of how the finished product is supposed to look, thereby further reducing the likelihood of errors or misunderstandings.

In addition, the present invention provides a reliable technique by which  
30 a document can be ordered electronically, thus obviating the need for the author to physically visit the document assembly location. This can have the effect of further increasing document ordering efficiency.

By including automatic verification of the document specification, the present invention also can avoid later delays in the document assembly process. Also, by automatically routing an order request based on distance to the recipient and location capabilities, the present invention often can achieve maximum efficiency  
5 in the overall document delivery system. The present invention can further increase efficiency by automatically formatting order information so as to facility routing and/or document assembly.

Although the present invention has been described in detail with regard to the exemplary embodiments and drawings thereof, it should be apparent to those  
10 skilled in the art that various adaptations and modifications of the present invention may be accomplished without departing from the spirit and the scope of the invention. Accordingly, the invention is not limited to the precise embodiments shown in the drawings and described in detail above. Therefore, it is intended that all such variations not departing from the spirit of the invention be considered as  
15 within the scope thereof as limited solely by the claims appended hereto.

For instance tasks are distributed between the processing facility 60 (server) and remote terminal (client) in a particular manner in the above embodiment. However, it should be understood that the tasks described above, particularly those relating to document specification and previewing, may instead be distributed in any  
20 other manner between the processing facility 60 and the remote terminal. Also, although a Java applet is utilized in the above described embodiment, any other platform independent or platform dependent computer executable code might be used instead at the remote terminal. Similarly, the Java applet might be eliminated entirely and most of the processing performed at the processing facility 60 (server)  
25 with the remote terminal merely running ordinary browser functions. It is also noted that, although images for all document views are generated at the outset in the above embodiment, each view might instead be generated on-the-fly as requested by a user. These and other design choices generally will be influenced by such factors as the current state of technology, capacity of the communication system  
30 used, and desired tradeoffs between speed and memory usage.

It should be understood that the present invention also relates to machine readable media on which are stored (encoded) program instructions for performing the methods of this invention. Such media include, by way of example,

magnetic disks, magnetic tape, optically readable media such as CD ROMs, semiconductor memory such as PCMCIA cards, etc. In each case, the medium may take the form of a portable item such as a small disk, diskette, cassette, etc., or it may take the form of a relatively larger or immobile item such as a hard disk drive or

5 RAM provided in a computer.

In the following claims, those elements which do not include the words "means for" are intended not to be interpreted under 35 U.S.C. § 112 ¶ 6.

### CLAIMS

1. A method of obtaining and processing information for creating a document, said method comprising:
  - 5 (a) transmitting a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;
  - 10 (b) evaluating the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document according to the document information; and
  - (c) receiving the document information from the remote terminal.
- 15 2. A method according to Claim 1, wherein step (b) is performed by computer executable process steps included in the data packet before the document information is received.
3. A method according to Claim 1, wherein step (b) is performed after the  
20 document information is received.
4. A method according to Claim 1, wherein the data packet is transmitted over an internet connection.
- 25 5. A method according to Claim 1, wherein the data packet comprises a Java applet.
6. A method according to Claim 1, wherein step (b) includes evaluating whether thickness of the document is within a range capable of being  
30 accommodated by a specified binding.
7. A method according to Claim 1, wherein step (b) includes evaluating whether a printed page is capable of being printed as specified, by considering a

specified printing instruction for the printed page and also considering stored properties for a media type specified for the printed page.

8. A method according to Claim 1, further comprising transmitting a confirmation message to the remote terminal after receiving the document information.

9. A method according to Claim 1, wherein the data packet includes computer executable process steps to enable the user to preview an image of the document, as assembled.

10. A method according to Claim 1, further comprising a step of (d) formatting the document information so as to facilitate assembly of the document.

11. A method according to Claim 10, wherein step (d) comprises generating a list of materials required to create the document.

12. A method of obtaining, processing and routing information for creating a document, said method comprising:

(a) transmitting a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;

(b) receiving the document information from the remote terminal; and  
(c) routing the document information to one of plural document production locations based on a geographic distance from a specified location and based on capability to produce the document.

13. A method according to Claim 12, wherein step (c) comprises routing the document information to a document production location which is a closest location to the specified location that is capable of producing the document.

14. A method according to Claim 12, wherein the geographic distance is estimated based on zip code.

15. A method according to Claim 12, further comprising a step of formatting  
5 the document information so as to facilitate assembly of the document.

16. A method according to Claim 12, wherein the step of formatting the document information so as to facilitate assembly of the document comprises listing a type of printing required for each media used to create the document.

10

17. A method according to Claim 12, wherein the document information is routed to a document production location via a wide area network.

18. A method according to Claim 12, wherein the document information is  
15 routed to a document production location via an internet connection.

19. A method according to Claim 12, further comprising a step of evaluating the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document  
20 according to the document information.

20. A method according to Claim 19, wherein the step of evaluating the document information is performed by computer executable process steps included in the data packet before the document information is received in step (b).

25

21. A method of obtaining and processing information for creating a document, said method comprising:

(a) transmitting a data packet to a remote terminal, said data packet including:

30

(1) information to generate a user interface,

(2) information to enable a user to input document information,

wherein the document information specifies an arrangement of components for

creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding, and

(3) computer executable process steps to evaluate the document information by utilizing stored properties for the components to determine  
5 whether it is physically possible to create a document according to the document information;

(b) receiving the document information from the remote terminal; and

(c) formatting the document information so as to facilitate assembly of the document.

10

22. A method according to Claim 21, wherein the computer executable process steps in the data packet include a step to output an error message if it is not physically possible to create the document according to the document information.

15 23. A method according to Claim 21, wherein the computer executable process steps in the data packet include steps to evaluate at least one of: whether a page can be printed as specified and whether thickness of the document is within a range capable of being accommodated by a specified binding.

20 24. Computer-executable process steps stored on a computer readable medium, said process steps for obtaining and processing information for creating a document, said process steps comprising steps to:

(a) transmit a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input  
25 document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;

(b) evaluate the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document  
30 according to the document information; and

(c) receive the document information from the remote terminal.

25. Computer-executable process steps stored on a computer readable medium, said process steps for obtaining, processing and routing information for creating a document, said process steps comprising steps to:

- 5 (a) transmit a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;
- 10 (b) receive the document information from the remote terminal; and  
(c) route the document information to one of plural document production locations based on a geographic distance from a specified location and based on capability to produce the document.

15 26. Computer-executable process steps stored on a computer readable medium, said process steps for obtaining and processing information for creating a document, said process steps comprising steps to:

- (a) transmit a data packet to a remote terminal, said data packet including:
- 20 (1) information to generate a user interface,  
(2) information to enable a user to input document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding, and
- 25 (3) computer executable process steps to evaluate the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document according to the document information;
- (b) receive the document information from the remote terminal; and
- 30 (c) format the document information so as to facilitate assembly of the document.



27. An apparatus for obtaining and processing information for creating a document, comprising:

a processor for executing stored program instruction steps; and  
a memory connected to the processor for storing the program

5 instruction steps,

wherein the program instruction steps include steps to:

(a) transmit a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input document information, wherein the document information specifies an arrangement  
10 of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;

(b) evaluate the document information by utilizing stored properties for the components to determine whether it is physically possible to create a document according to the document information; and

15 (c) receive the document information from the remote terminal.

28. An apparatus for obtaining, processing and routing information for creating a document, comprising:

a processor for executing stored program instruction steps; and

20 a memory connected to the processor for storing the program instruction steps,

wherein the program instruction steps include steps to:

(a) transmit a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input  
25 document information, wherein the document information specifies an arrangement of components for creating a document, the components including at least two of: a printed page, a tab page, a front cover, a back cover, and a binding;

(b) receive the document information from the remote terminal; and

(c) route the document information to one of plural document  
30 production locations based on a geographic distance from a specified location and based on capability to produce the document.

29. An apparatus for obtaining and processing information for creating a document, comprising:

a processor for executing stored program instruction steps; and  
a memory connected to the processor for storing the program

5 instruction steps,

wherein the program instruction steps include steps to:

(a) transmit a data packet to a remote terminal, said data packet  
including:

(1) information to generate a user interface,

10 (2) information to enable a user to input document information,  
wherein the document information specifies an arrangement of components for  
creating a document, the components including at least two of: a printed page, a tab  
page, a front cover, a back cover, and a binding, and

(3) computer executable process steps to evaluate the  
15 document information by utilizing stored properties for the components to determine  
whether it is physically possible to create a document according to the document  
information;

(b) receive the document information from the remote terminal; and

(c) format the document information so as to facilitate assembly of the  
20 document.

30. A method of obtaining and processing information for creating a document, said method comprising:

(a) transmitting a data packet to a remote terminal, said data packet  
25 including information to generate a user interface and to enable a user to input  
document information, said document information specifying a type of medium on  
which information is to be printed;

(b) evaluating the document information to determine whether it is  
physically possible to print a document according to the document information; and

(c) receiving the document information from the remote terminal.

31. A method according to Claim 30, wherein step (b) is performed by computer-executable process steps included in the data packet before the document  
5 information is received.

32. A method according to Claim 30, wherein step (b) is performed after the document information is received.

10 33. A method according to Claim 30, further comprising a step of:  
(d) displaying an error message if the type of medium on which information is to be printed is not capable of being printed as specified.

34. A method according to Claim 33, wherein the error message is  
15 displayed when double-sided printing has been specified for a type of medium that is only capable of single-sided printing.

35. A computer-readable medium storing computer-executable process steps for obtaining and processing information for creating a document, wherein said  
20 process steps include steps to:

(a) transmit a data packet to a remote terminal, said data packet including information to generate a user interface and to enable a user to input document information, said document information specifying a type of medium on which information is to be printed;

- (b) evaluate the document information to determine whether it is physically possible to print a document according to the document information; and
- (c) receive the document information from the remote terminal.

1/15

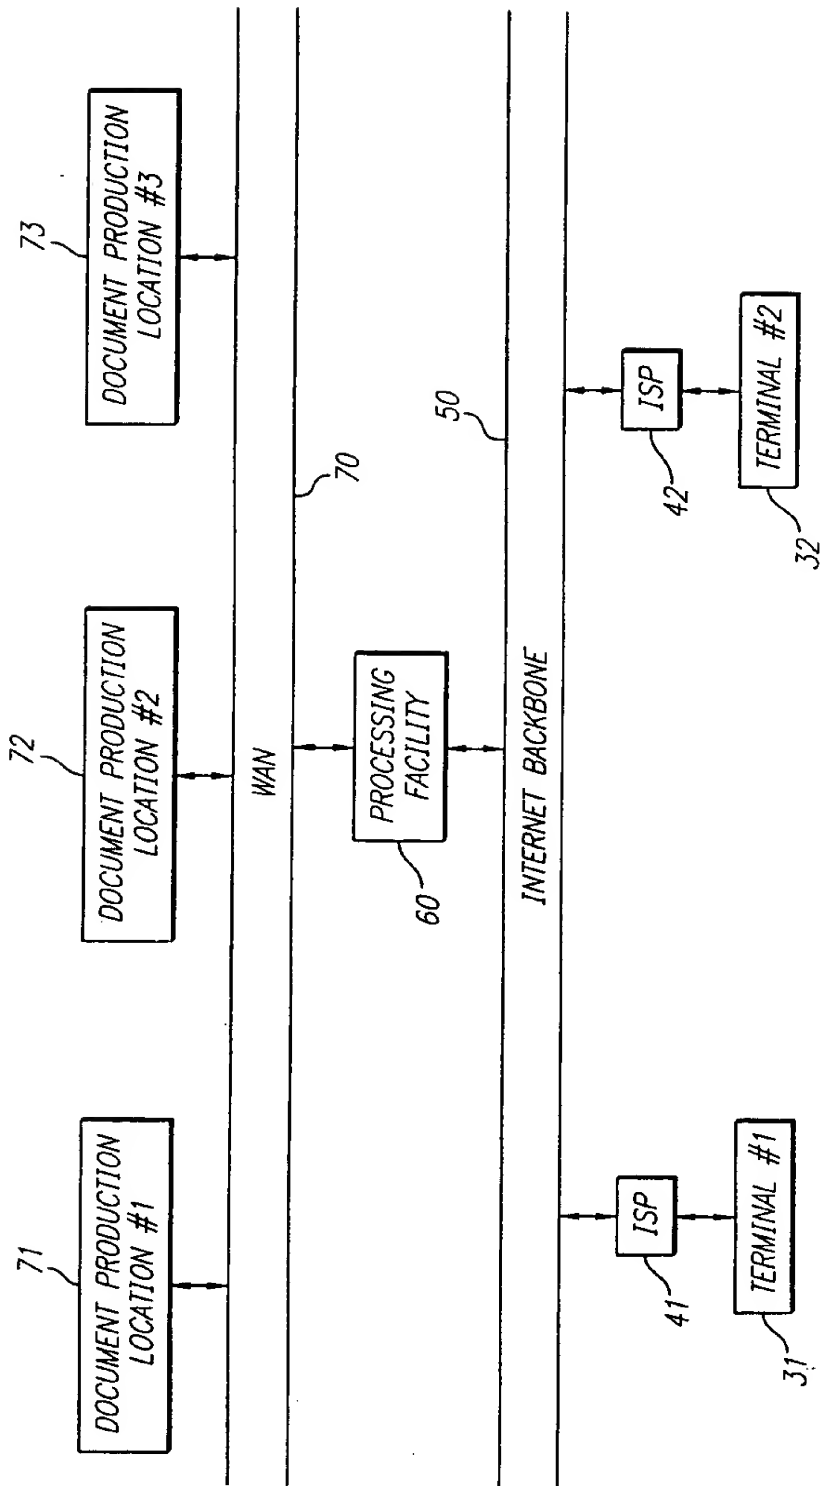


FIG. 1

2/15

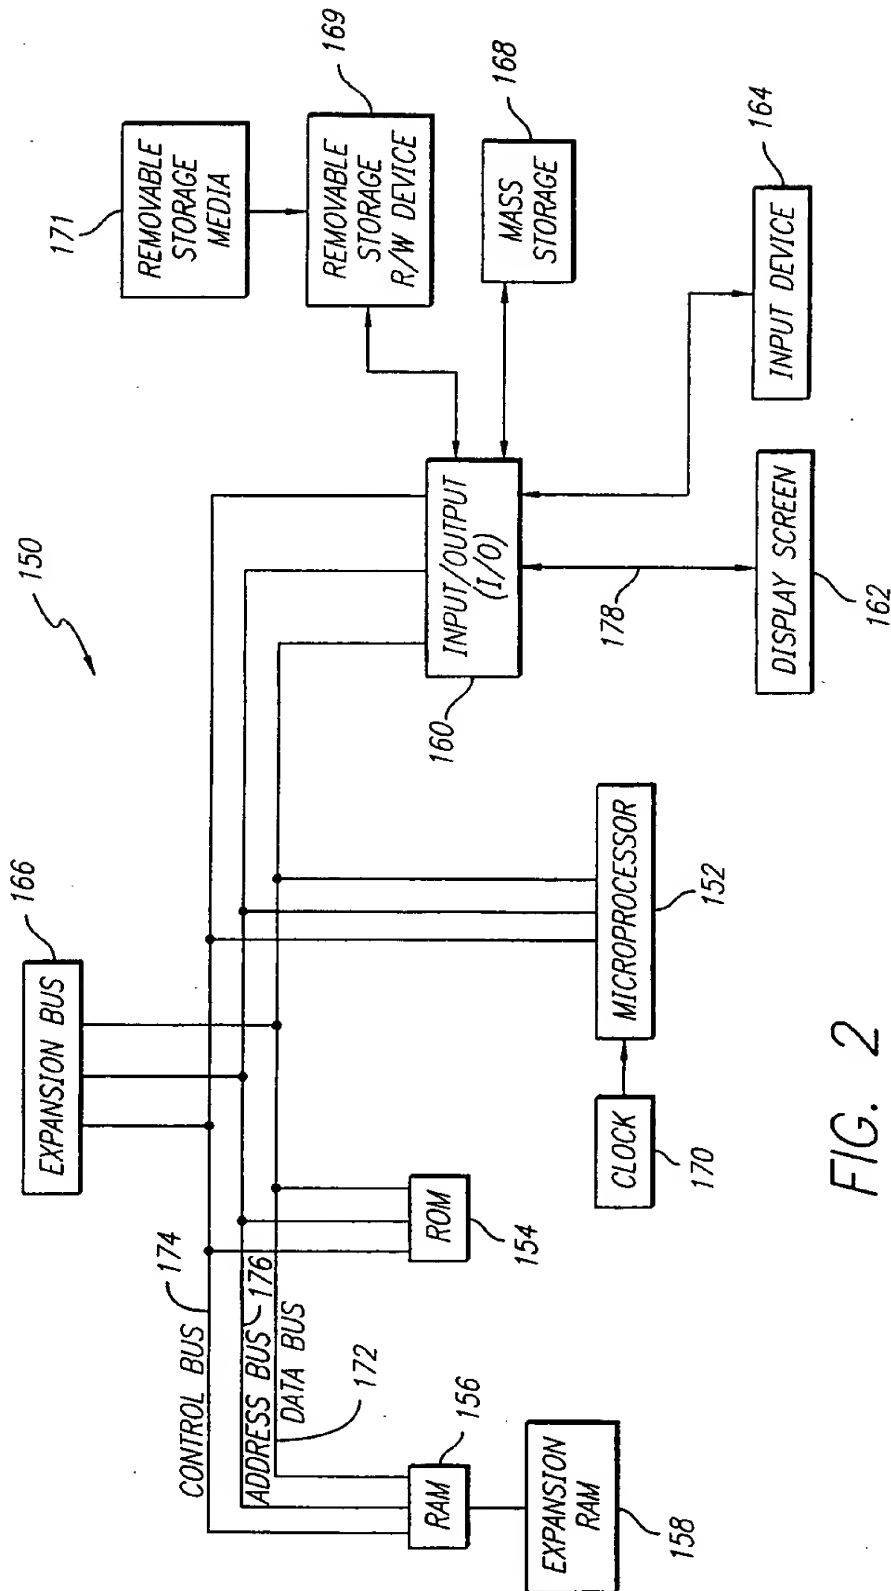


FIG. 2

3/15

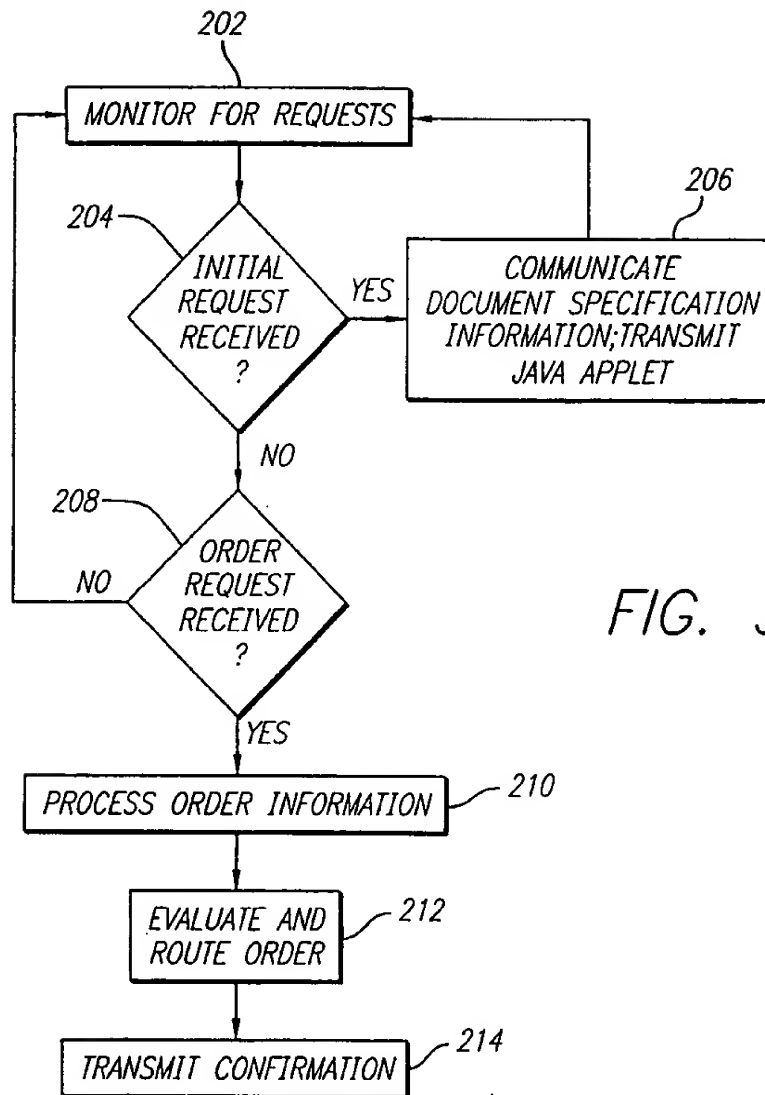


FIG. 3

4/15

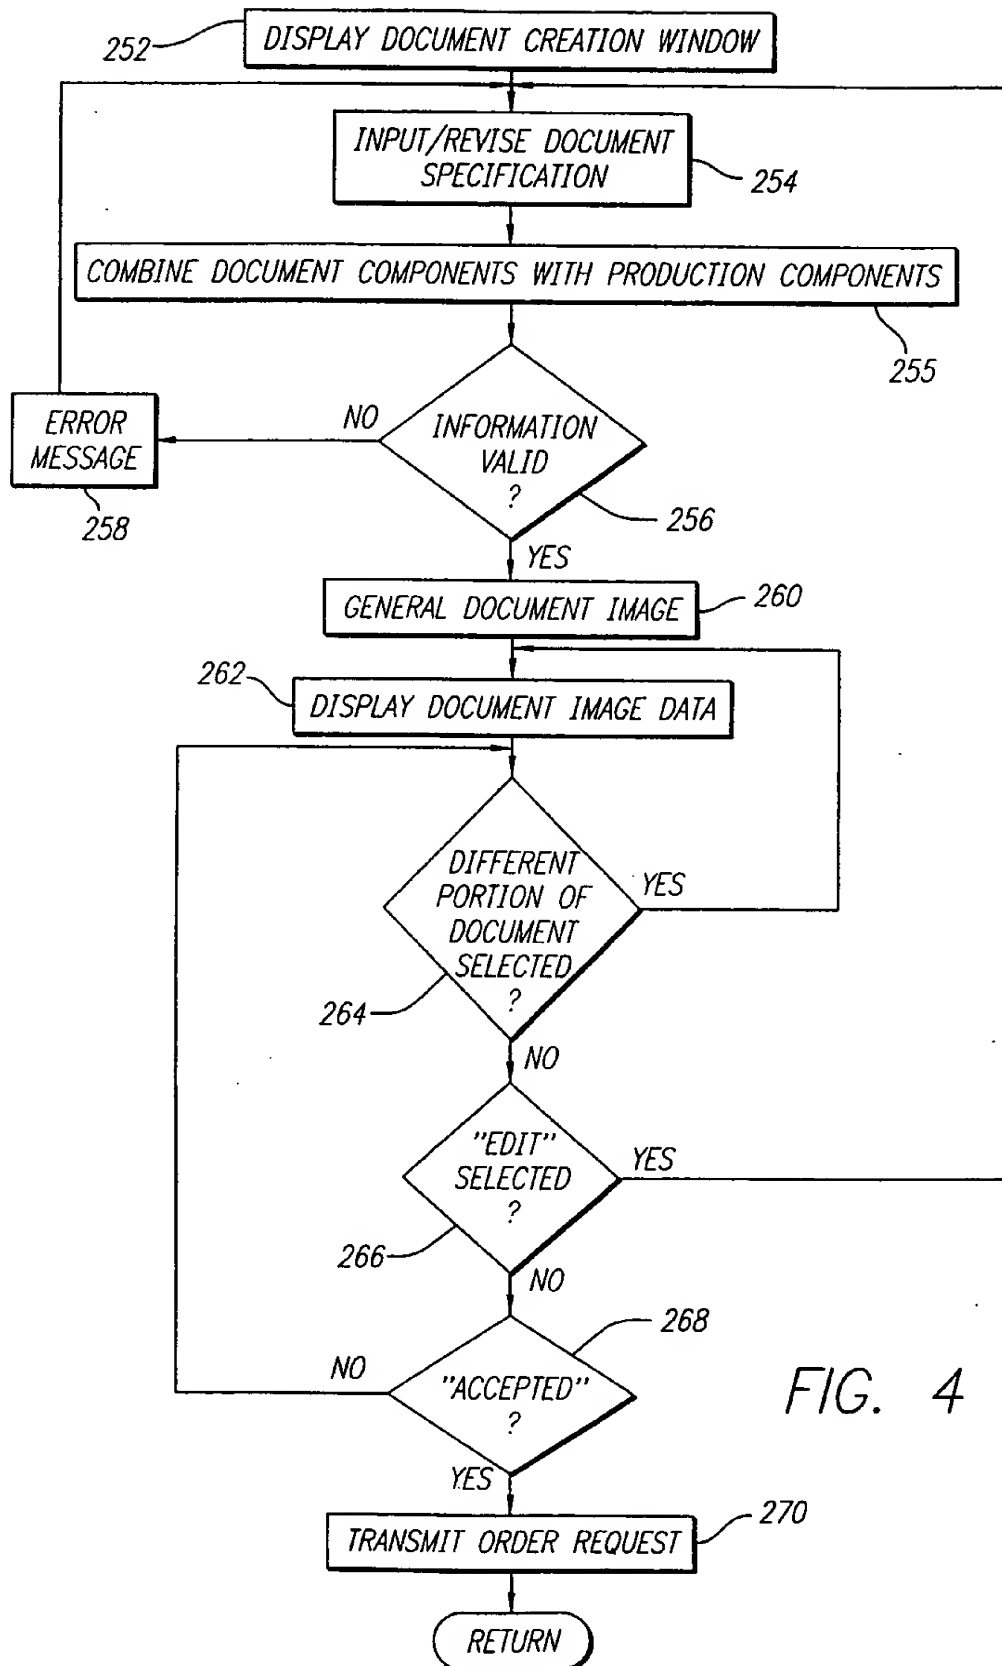


FIG. 4



5/15

FIG. 5A

300

Robert Tonkin/New Document/New Document Help Logout

Projects

Add Documents

Enter a name for the new document and select either to base it on a previous documents or to start from scratch. The document name may be up to 32 characters in length.

New Document Name: 301

Based On: 302 (from scratch)

OK 303 Cancel 304

6/15

FIG. 5B

310

Robert Tonkin/Test Help Logout

**Document Builder**

Document Name: test 311

Source File: Volvo Details... 312

Paper Size: ☒ Use size from source file: 8.5x11 314 ☐ Scale To Fit: (none) 319

Bind: (choose side) (choose type) (choose color) 318

316 Staple: (none) 320

Drill: (none) 322

Fold: (none) 324

**Document Composition**

326

328 Add 330 Remove 332 Edit 334 Move Up 336 Move Down

To add the next component to your document, click on the plus (add) button again and select the next component. To delete, edit, or change the order of a component choose the corresponding button. When you have finished adding components click OK.

Comments: 340

OK 342 Cancel 344

7/15

FIG. 5C

360


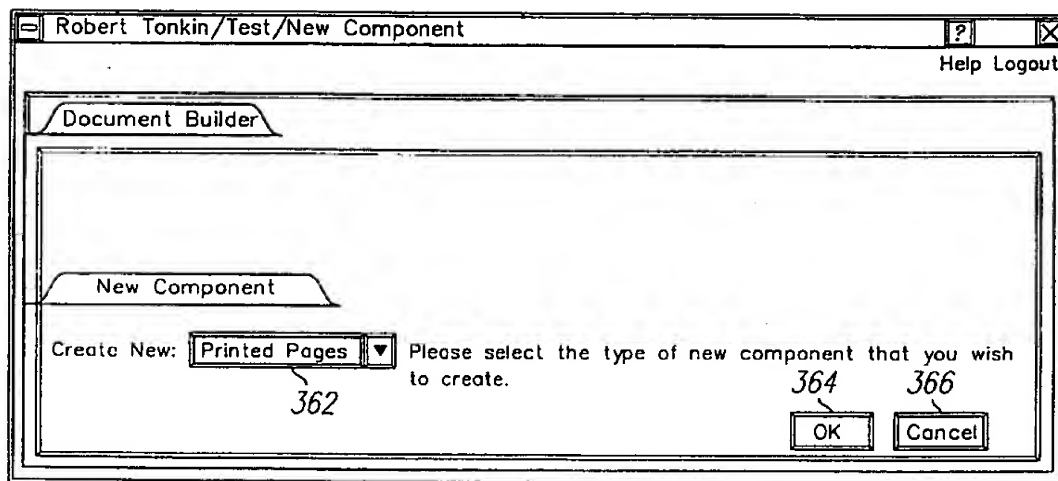


FIG. 5D

380

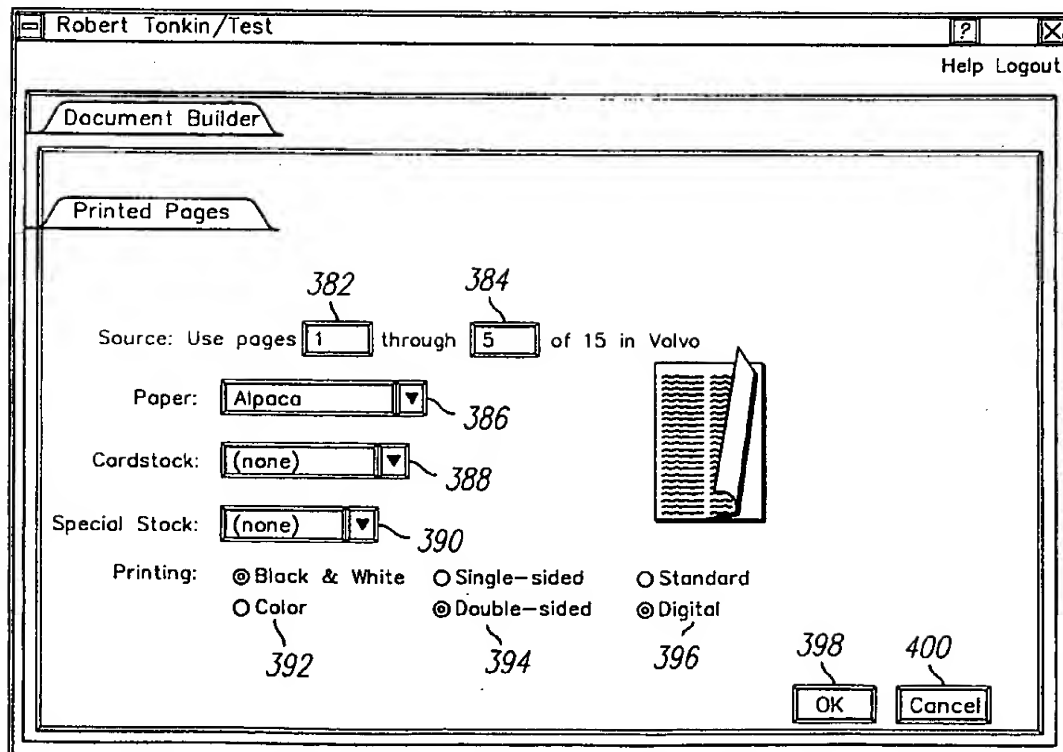

8/15

FIG. 5E

310

Robert Tonkin/Test Help/Logout

**Document Builder**

Document Name:

Source File:

Paper Size: ☒ Use size from source file: 8.5x11

☐ Scale To Fit:

Bind:

Staple:

Drill:

Fold:

**Document Composition**

PRINTED PAGES 1-5 Alpaca Paper Double-sided Black 327

326

Add Remove Edit Move Up Move Down

To add the next component to your document, click on the plus (add) button again and select the next component. To delete, edit, or change the order of a component choose the corresponding button. When you have finished adding components click OK.

Comments:

342 344

9/15

FIG. 5F

310

Robert Tonkin/HTML demo Help Logout

**Document Builder**

Document Name: HTML demo 311

Source File: html4 Details... 315

Paper Size: 312 ☒ Use size from source file: 8.5x11 315  
314 ☐ Scale To Fit: (none) 317

Bind: Left 316 Comb 317 Black 318

Staple: (none) 320

Drill: (none) 322

Fold: (none) 324

**Document Composition**

431 FRONT COVER: Printed, Page 1, Sandstone Cardstock, B...  
432 PRINTED PAGES 1-363: Green Paper, Double-sided, Colo...  
433 TAB: "The End"—Font: Helvetica  
434 PRINTED PAGES 1-363: 20# White Paper, Single-sided,...  
435 PRINTED PAGES 1-363: 32# White Glossy Paper, Single-... 326  
436 BACK COVER: Non-printed, Red Vinyl Special Stock


328 Add 330 Remove 332 Edit 334 Move Up 336 Move Down

To add the next component to your document, click on the plus (add) button again and select the next component. To delete, edit, or change the order of a component choose the corresponding button. When you have finished adding components click OK.

Comments: 340 342 344


OK Cancel

10/15

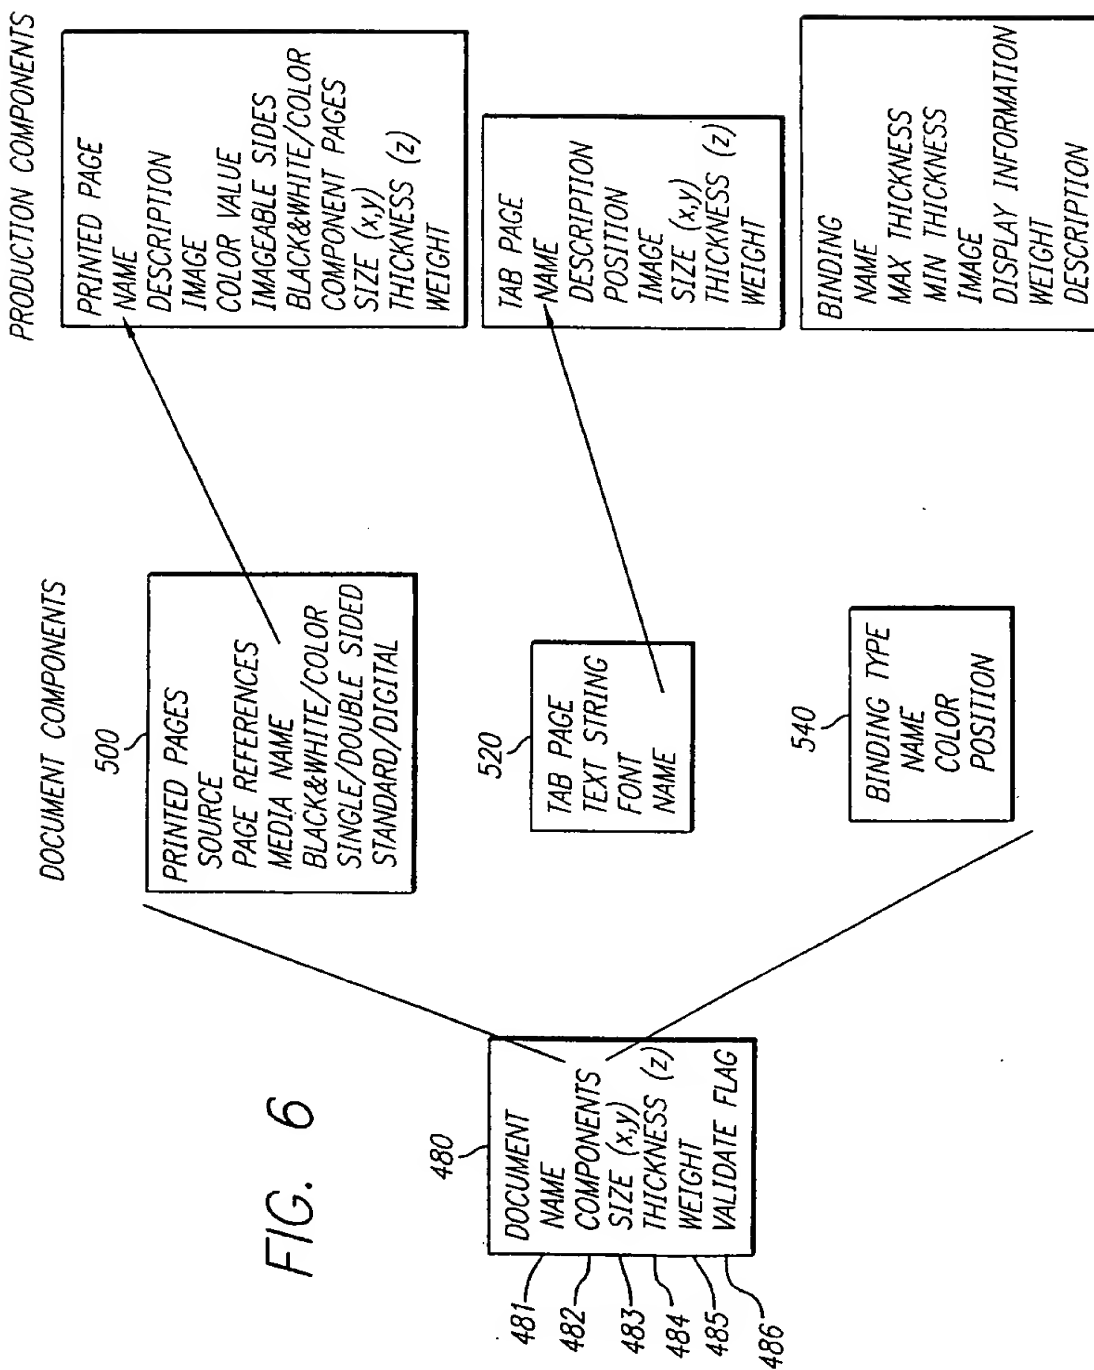

11/15

FIG. 7

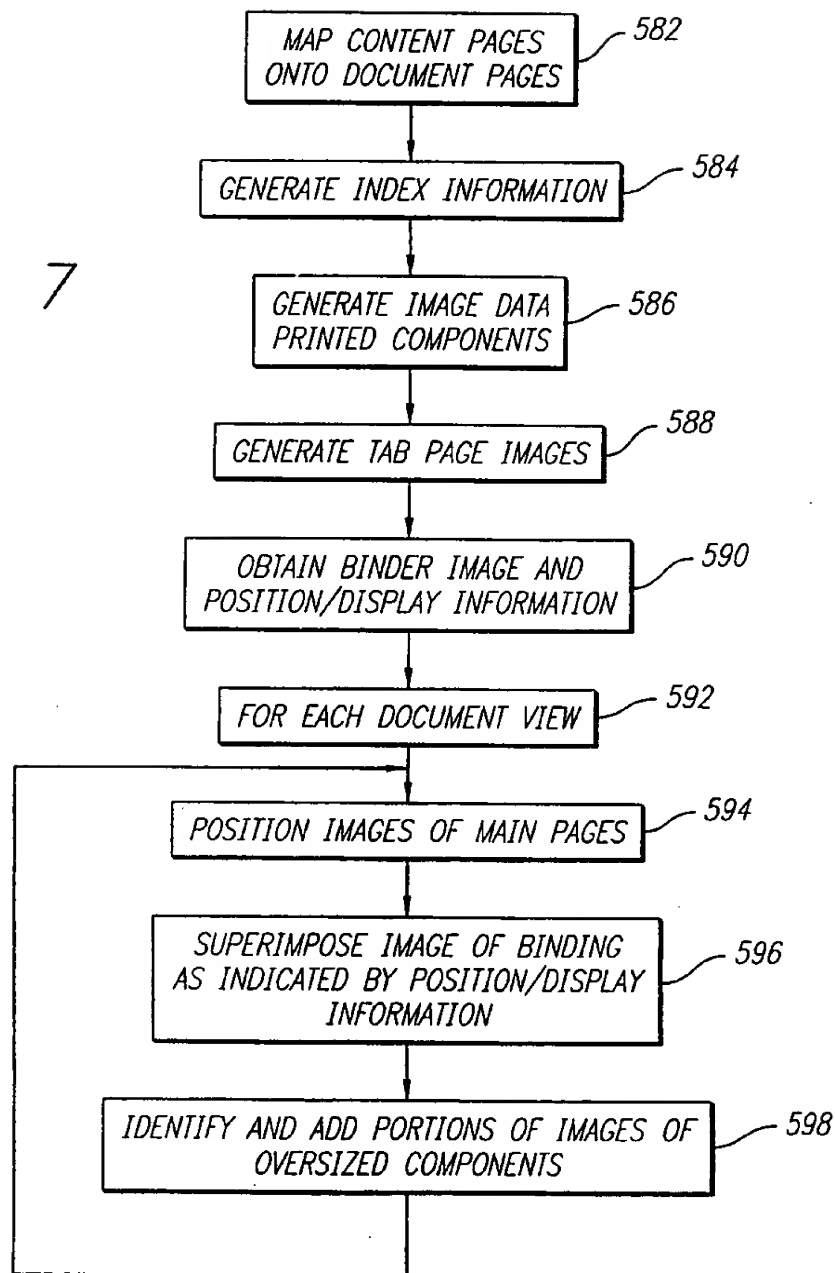

12/15

FIG. 8A

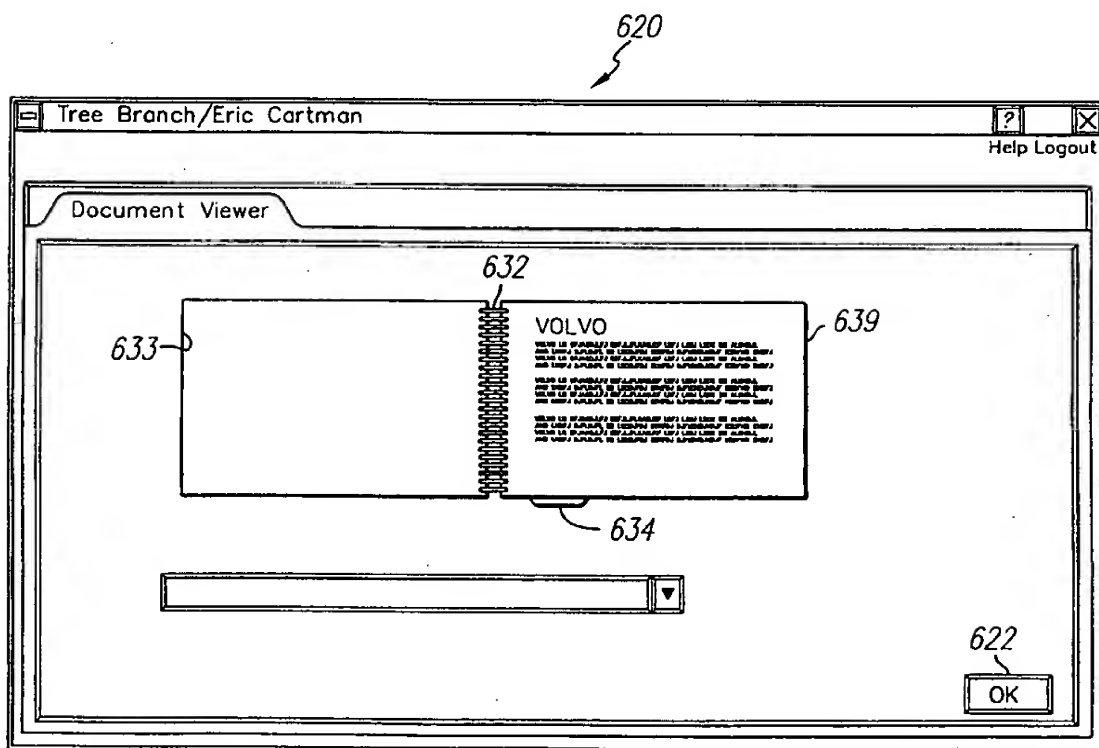
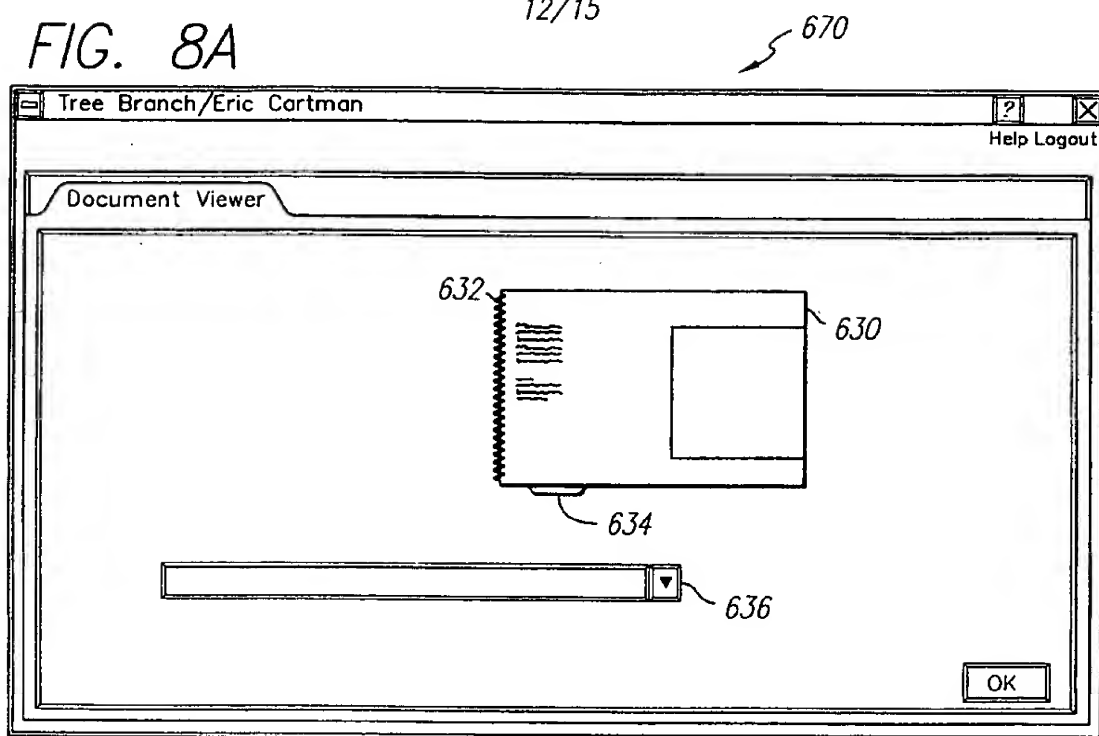


FIG. 8B



FIG. 8C

13/15

620



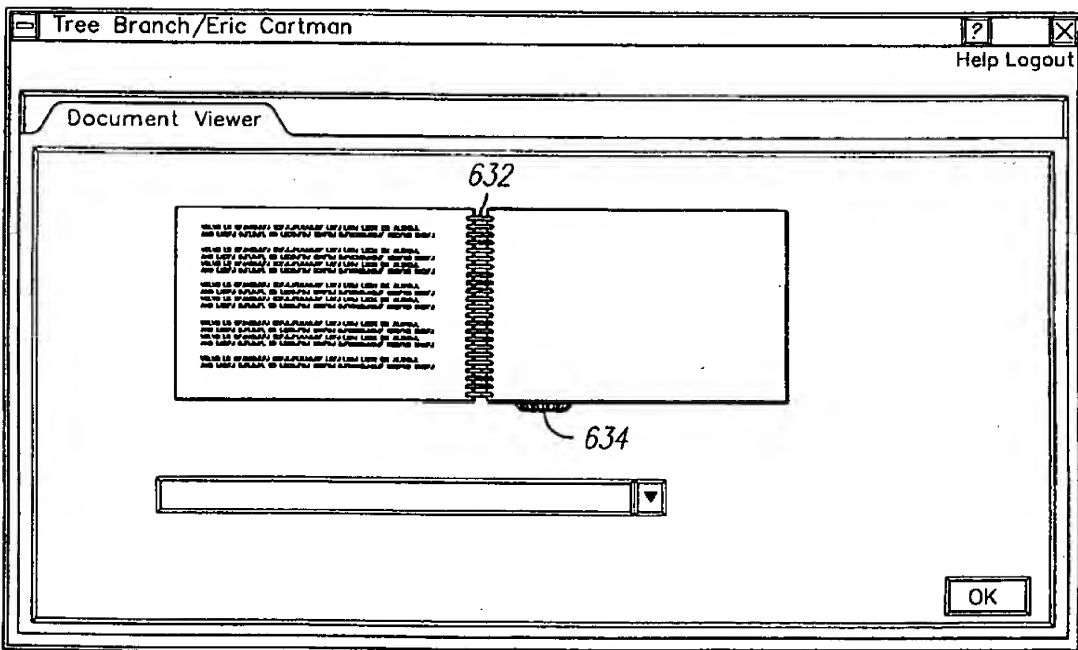


FIG. 8D

FIG. 8E

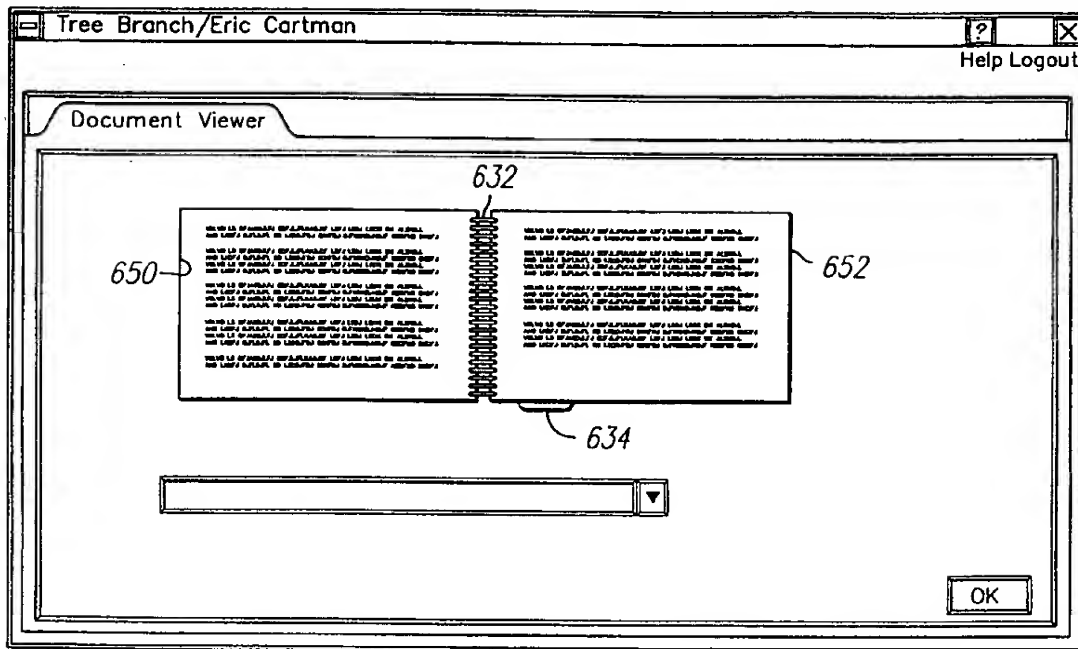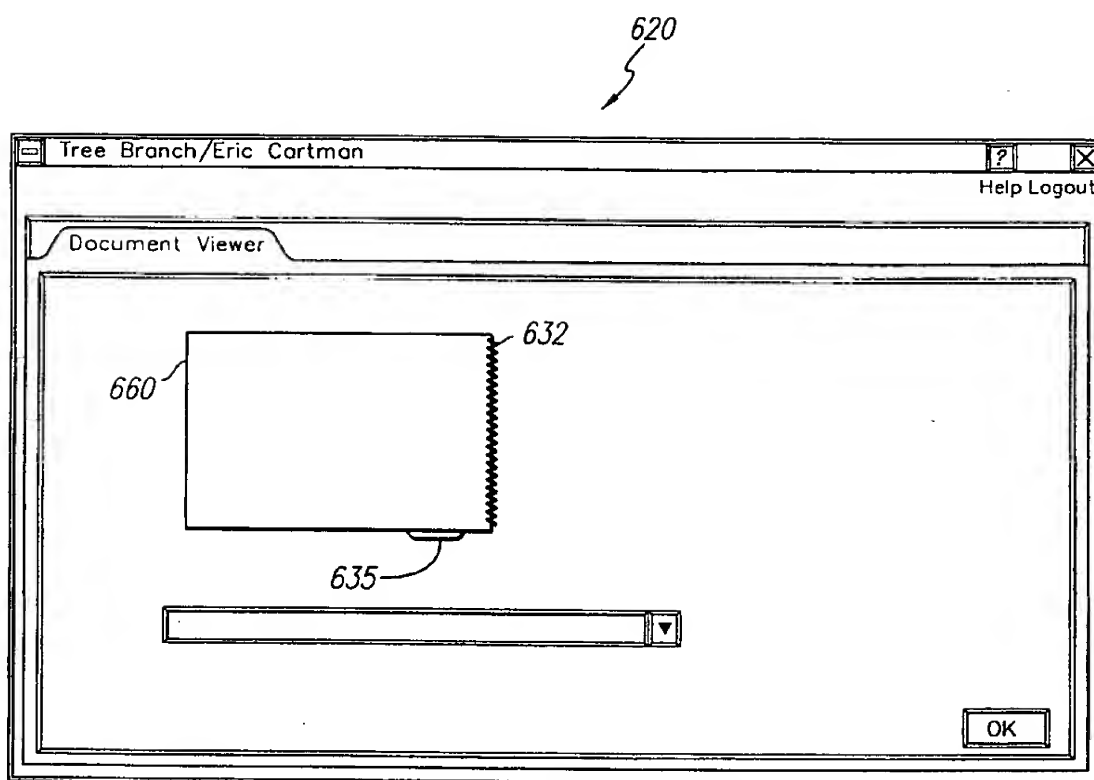

15/15

FIG. 9

670

Eric Cartman Admin Help Logout

---

**Job Information**

Current Status: incoming      Requested Due Time: 1 Nov 98 04:00PM

**Customer & Recipient information**

<p>682 Recipient:</p> <p>Robert Tonkin 255 West Stanley Ventura, CA 93002</p>	<p>Customer:</p> <p>Robert Tonkin 255 West Stanley Ventura, CA 93002</p>
---	--

684

**Aggregate Production Summary**

672 Materials:

- 1 sheet: RC2-Sandstone Letter
- 8 sheets: P8-Green Letter
- 1 sheet: VC6-Red Vinyl Letter
- 1 unit: 5-bank white tabs
- 1 unit: 6mm Black Coil Binding

<p>674 Printing:</p> <p>Digital Black &amp; White Digital Color</p>	<p>Estimated Run Time:</p> <p>approx. 1.028 seconds approx. 2.9 minutes</p>
<p>676 Labor:</p> <p>6mm Black Coil Binding</p>	<p>Estimated Run Time:</p> <p>approx. 4.3 minutes</p>

<p>Requested Due Time:</p> <p>1 Nov 98 04:00PM</p>	<p>Estimated Total Run Time:</p> <p>approx. 4.3 minutes</p>
--	---

675

**Document(s) Ordered**

<p>678 Document Name</p> <p>HTML demo</p>	<p>Source</p> <p>c70.pdt</p>	<p>Sets</p> <p>1</p>
---	------------------------------	----------------------

<p>680 Printing:</p> <p>Digital Black &amp; White</p> <p>Digital Color</p> <p>Digital Black &amp; White</p> <p>none</p>	<p>Media</p> <p>RC2-Letter</p> <p>P8-Letter</p> <p>Precut Tab</p> <p>VC8-Letter</p>	<p>Sheets</p> <p>1</p> <p>8</p> <p>1</p> <p>1</p>
---	---	---

Get File   Get Tabs   Job Ticket   Preview

OK   Reject   Accept

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/25412

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G06F 17/21

US CL : 707/526, 527, 500

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 707/526, 527, 500

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST, DIALOG

search terms: online, binding, user interface, document creation, forms

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,E	US 6,006,242 A (POOLE et al) 21 December 1999	1-35
A,P	US 5,923,013 A (SUZUKI et al) 13 July 1999	1-35
A,P	US 5,845,302 A (CYMAN, JR. et al) 01 December 1998	1-35
A	US 5,563,999 A (YAKSICH et al) 08 October 1996	1-35
A	US 5,235,680 A (BIJNAGTE) 10 August 1993	1-35
A	US 5,109,252 A (SCHOTT, JR.) 28 April 1992	1-35
A	US 4,740,814 A (FOLKINS) 26 April 1988	1-35

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
03 JANUARY 2000

Date of mailing of the international search report  
14 FEB 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

MICHAEL RAZAVI

Telephone No. (703) 305-3900